
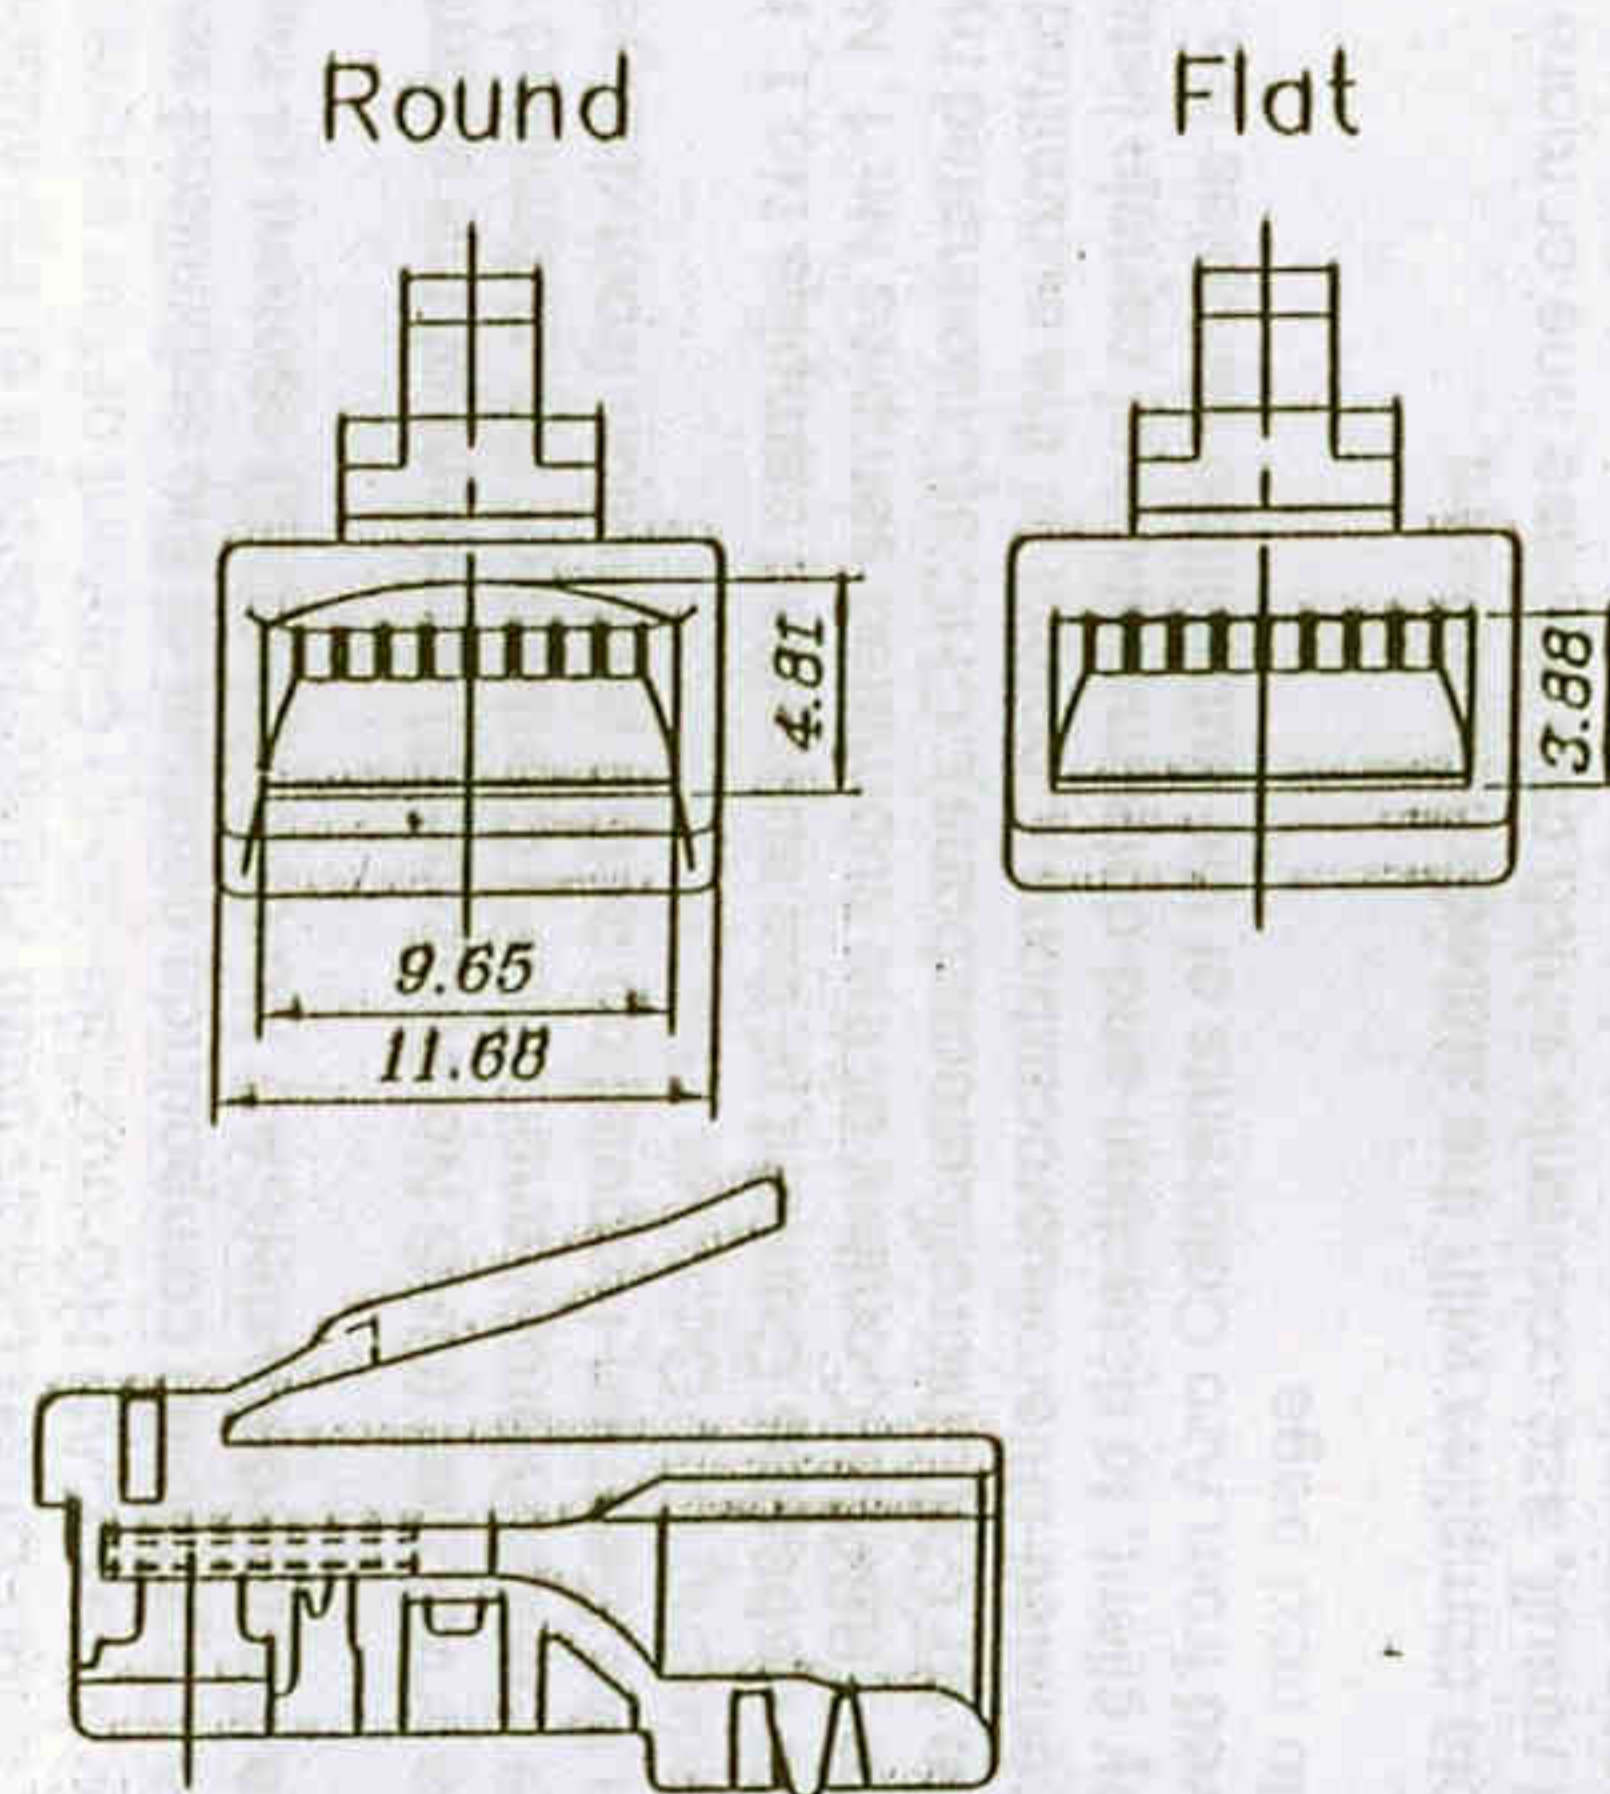


REV	DATE	MODIFICATION	DRAWN
	19/01/05		

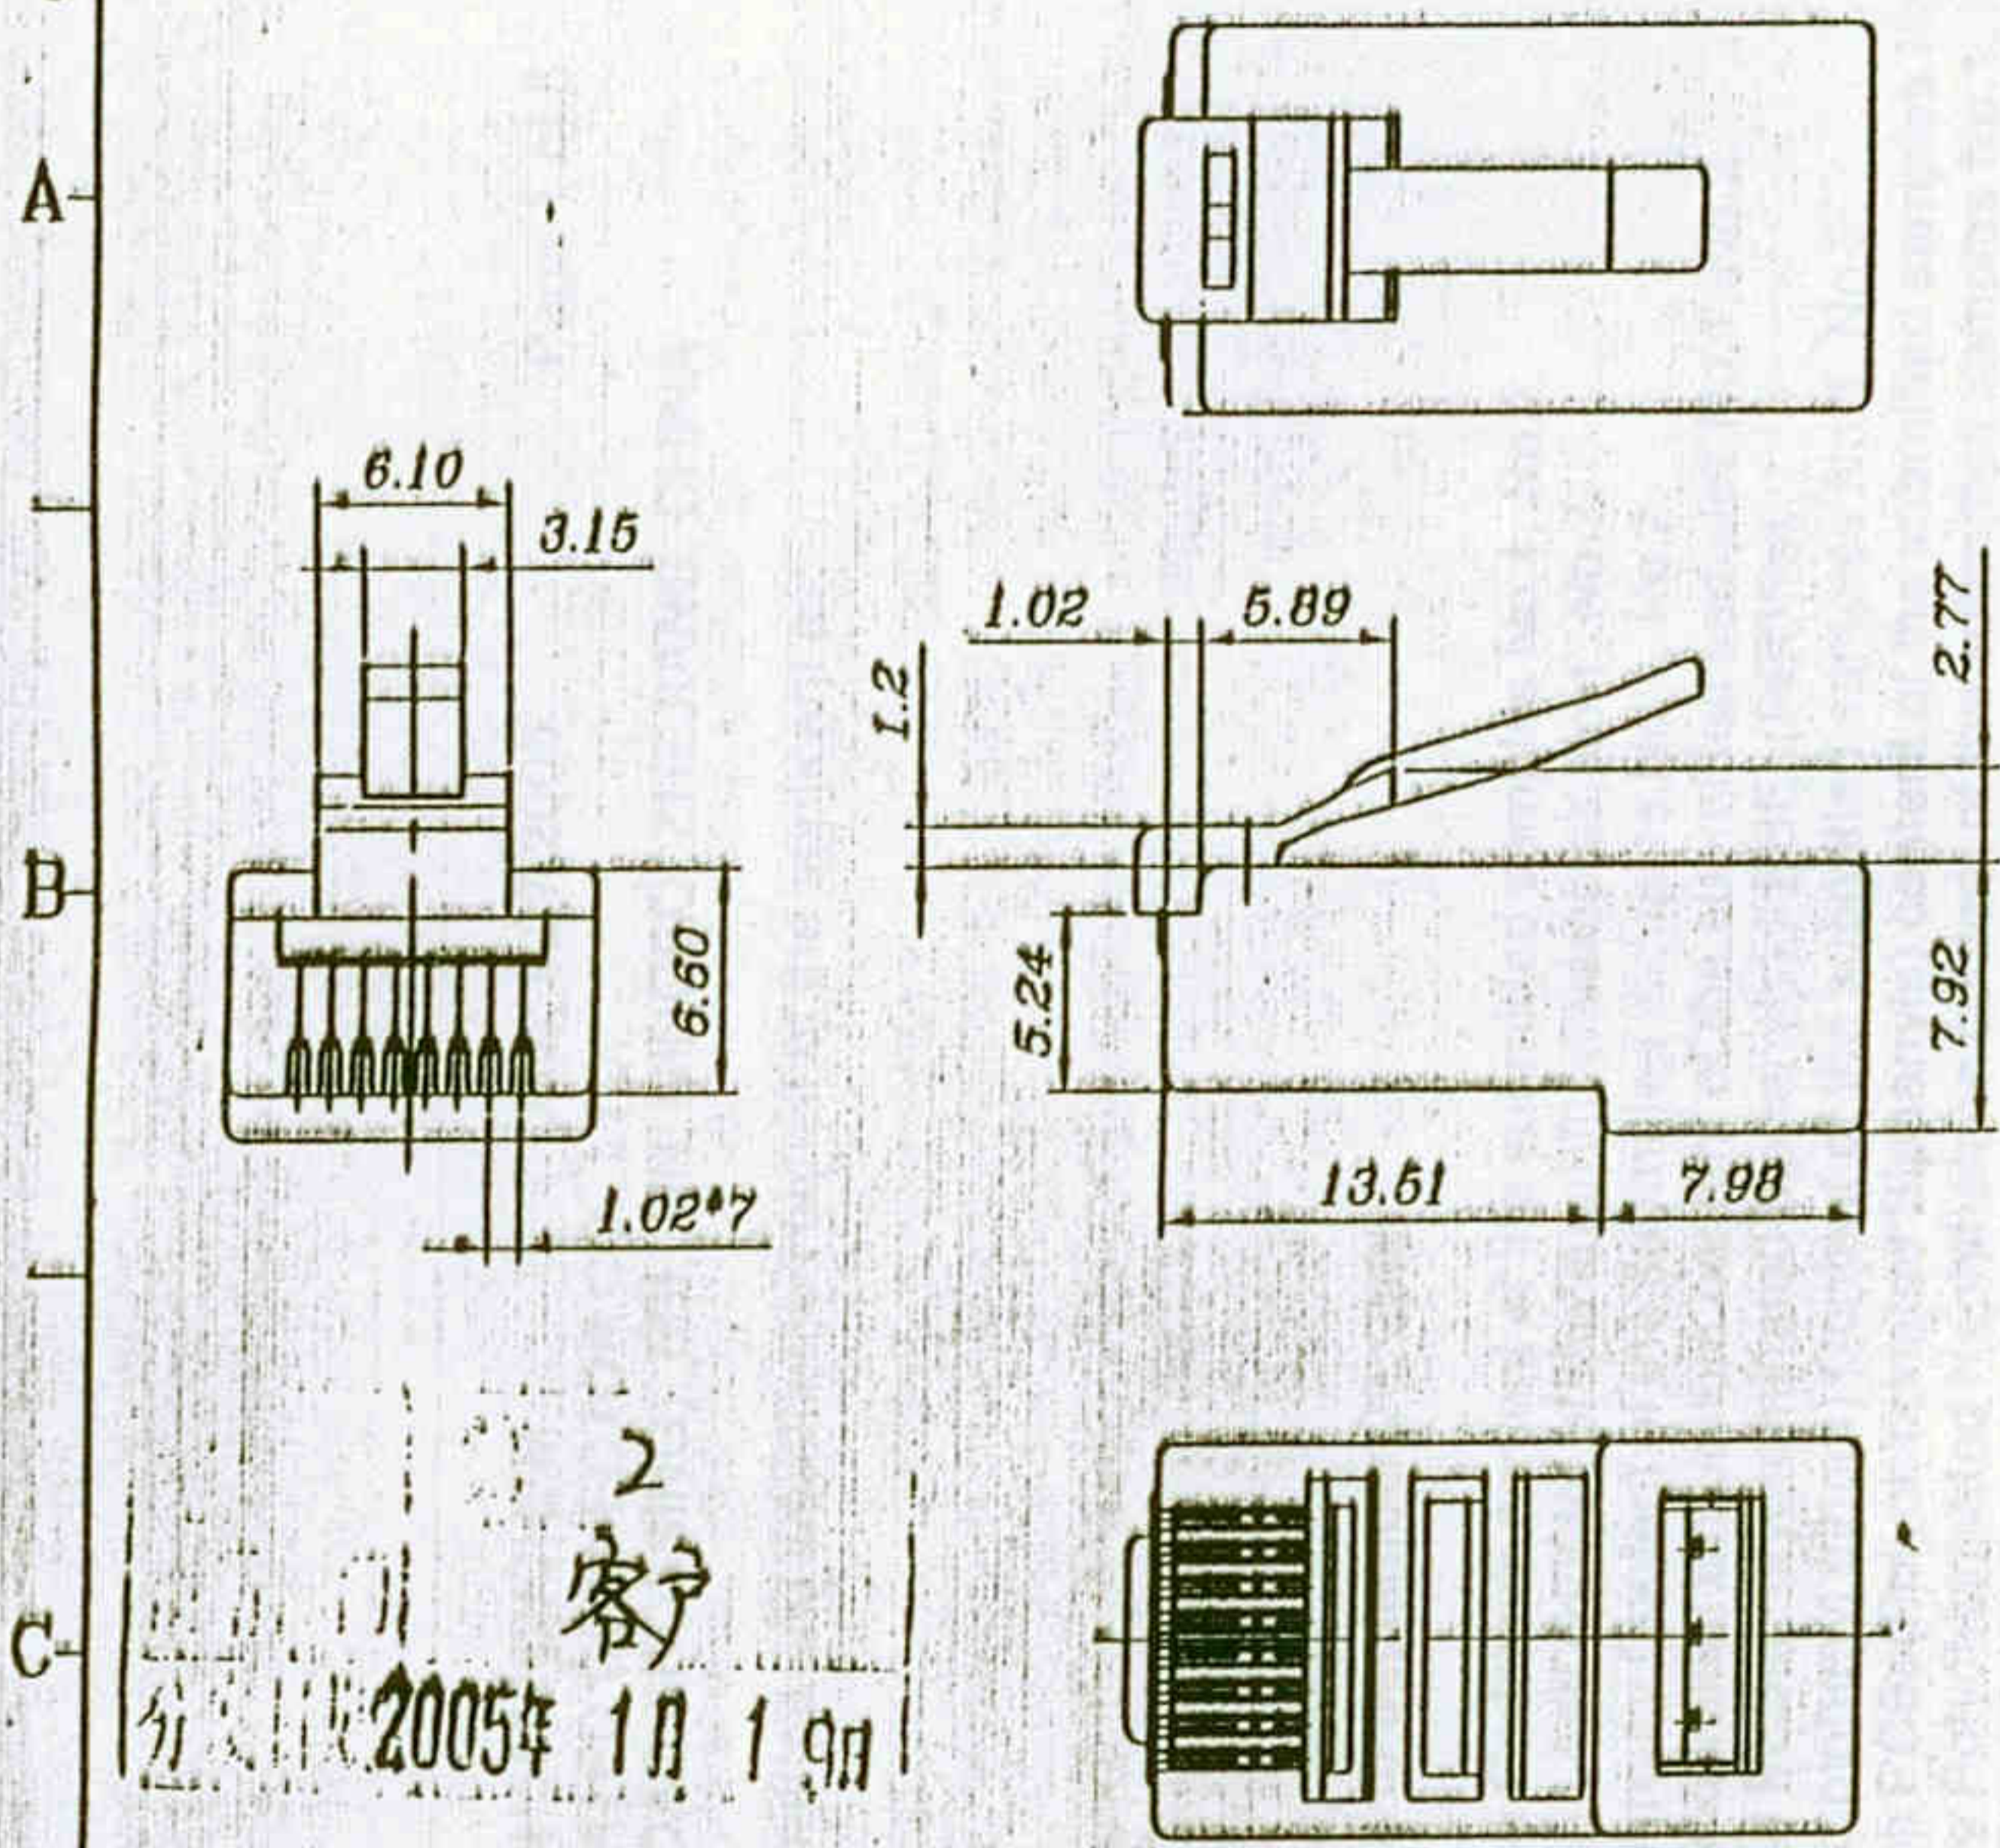

**SPECIFICATIONS**

**1. ELECTRICAL:**  
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC  
 INSULATION RESISTANCE: 100 M Ω  
 TERMINATION RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

**2. MECHANICAL:**  
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.  
 DURABILITY: 200 MATING CYCLES.

**3. MATERIAL & FINISH:**  
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.  
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.  
 CONTACT BLADE: PHOSPHOR BRONZE.  
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.  
 GOLD PLATING: 3u"-50u", ARE AVAILABLE.

**规范**

**1. 电器:**  
 UL应用最大250VOLTS AC.  
 介质耐电压伏特数:500VOLTS AC.  
 绝缘阻抗:100百万欧姆.  
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

**2. 机构**  
 拉力测试:至少19.6N/PCS.  
 耐力测试:至少200次之插拔测试.

**3. 材质表面处理**  
 塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.  
 颜色:透明,或者其他颜色亦可.  
 金片:磷铜片.  
 导体:多股线&单股线,24AWG,26AWG.  
 镀金厚度:3u"-50u",皆可提供.



客户  
 2005年 1月 19日

ITEM:

BLADE:	E	Y	Z	A	YL	ZL		
Drawing								
Mark	✓							
GOLD PLATING	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark					✓	Mark	✓	

2005年 1月 19日

客户用产品图

		宁波卓新通讯接插件有限公司	
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL	图 号 DWG NO.
		PC	PLUG-009
.X±0.20	.X°±5°	名 称 TITLE	
.XX±0.10	.XX°±2°	8P8CPLUG	
审 核 APPROVAL	核 对 CHECKED	制 图 DRAWN	比 例 SCALE
		Lucia	2/1
			张 数 SHEET
			1/1
			更 改 REV
			E

ST-DR-009A