

1 2 3 4 5 6 7



更改 REV	出图日期 DATE	设计内容 MODIFICATION	修改 DRAWN
	19/01/05		

A


B

C


D

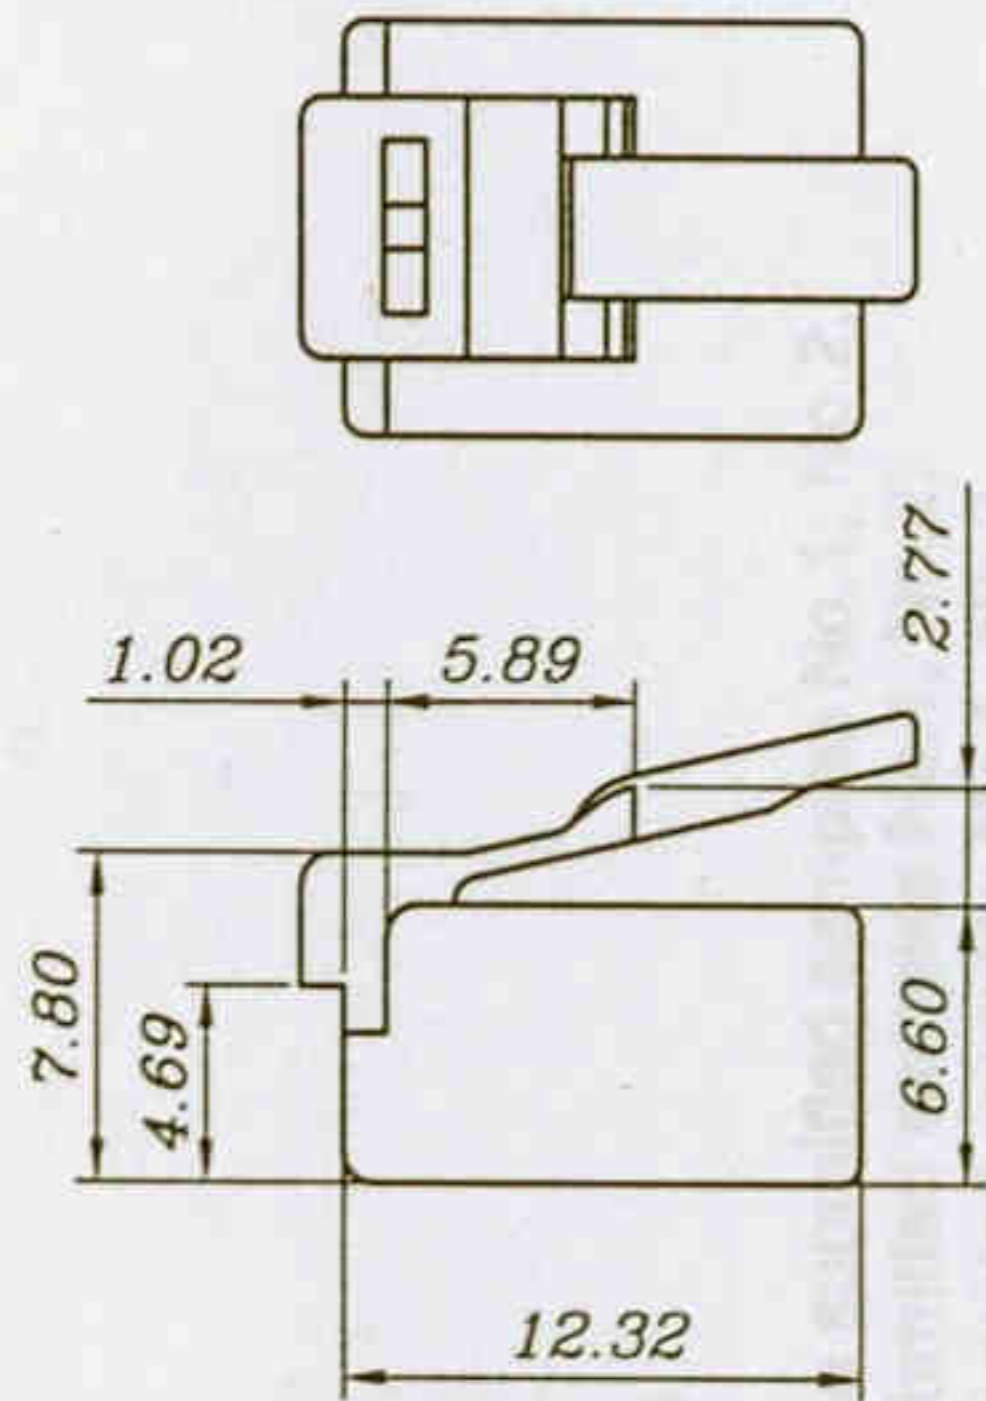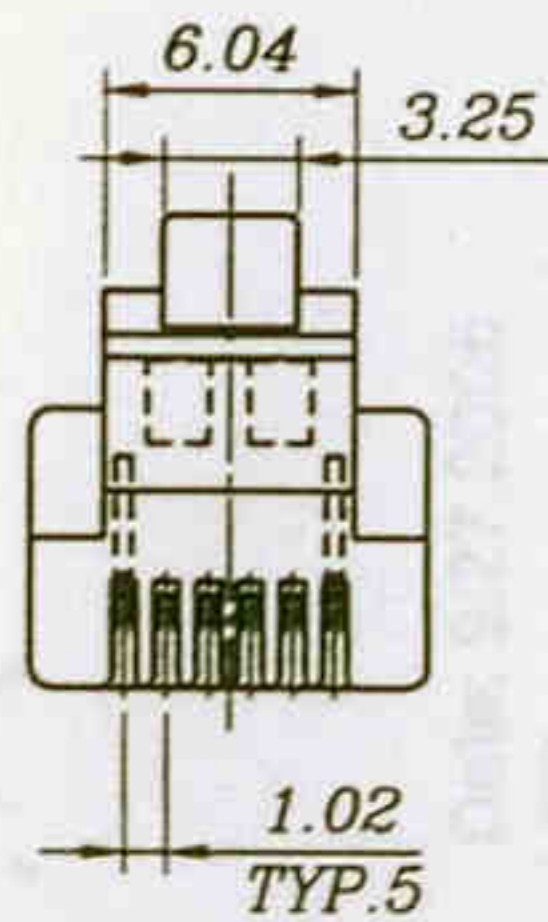

Round

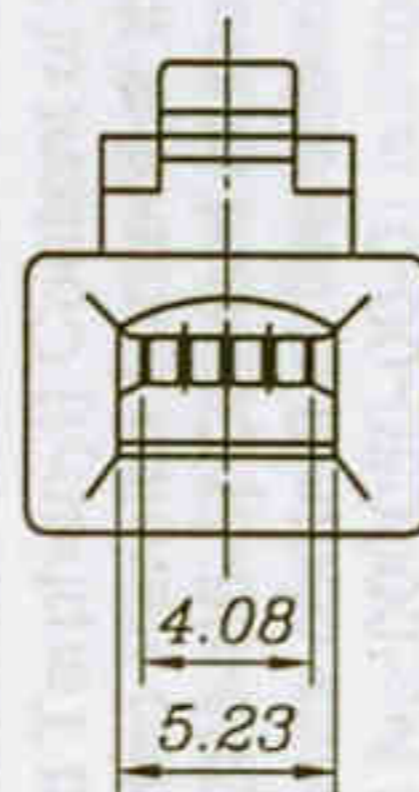

Flat

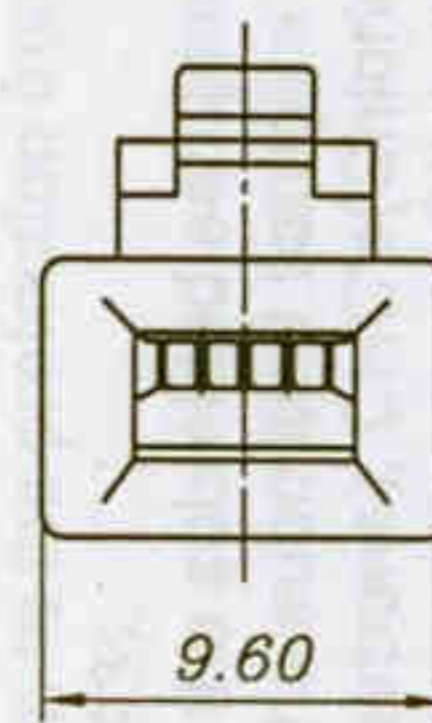

SPECIFICATIONS

- 1 ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
 INSULATION RESISTANCE: 100 MΩ
 TERMINATION RESISTANCE: 20mΩ MAX AFTER ENVIRONMENTAL TESTING
- 2 MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN
 DURABILITY: 200 MATING CYCLES
- 3 MATERIAL & FINISH
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE
 CONTACT BLADE: PHOSPHOR BRONZE
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG
 GOLD PLATING: 3u"-50u", ARE AVAILABLE

规范

1. 电器:
 UL应用最大250VOLTS AC.
 介质耐电压伏特数:500VOLTS AC.
 绝缘阻抗:100百万欧姆.
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.
2. 机构
 拉力测试:至少19.6N/PCS.
 耐力测试:至少200次之插拔测试.
3. 材质表面处理
 塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可.
 金片:磷铜片.
 导体:多股线&单股线,24AWG,26AWG.
 镀金厚度:3u"-50u",皆可提供.



发日期 2005年 1月 19日

BLADE:

Type	E-03	Y-03	Z-03	E-03	Y-03	AC-03
Drawing						
Mark				✓		

客户用产品图

宁波卓新通讯插件有限公司			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL PC	图号 DWG NO. PLUG-005
.X±0.20	.X°±5°	名称 TITLE 6P4CPLUG	
.XX±0.10	.XX°±2°		
审核 APPROVAL 沈红波	校对 CHECKED 鍾均工	制图 DRAWN Lucia	比例 SCALE 2/1
		张数 SHEET 1/1	更改 REV E

2005 10 19

1 2 3 4 5 6 7 ST-DR-009A